

EB2 400/3L 400A 3p



Specifications

ETI Code	004671092
Description	EB2 400/3L 400A 3p
Class name	Molded Case Circuit Breaker
Short circuit capacity (kA)	25kA
Rated current (A)	400A
Number of poles	3
Connection type	front connection
Rated impulse withstand voltage Uimp (kV)	8kV
Rated short-circuit breaking capacity at 415V Icu/Ics (kA)	25kA
Rated operational voltage AC (V)	690V
Rated operational voltage DC (V)	250V
Rated insulation voltage (V)	800V
Thermal adjustment	0,63-1
Magnetic adjustment	6-12
Adjustable or fixed	adjustable
Standards	60947
function	MCCB
Catalogue Group	EB2
Frame size	400A

Online product page [🔗](#)

Other documentation



3D Model

2D File

CE declaration


Eplan file

ETIM international classification

Classification	EC000228
Class name	Power circuit-breaker for trafo/generator/installation protection
Rated permanent current I _u	400A
Rated short-circuit breaking capacity I _{cu} at 400 V, 50 Hz	25/25kA
Overload release current setting	252...400A
Adjustment range undelayed short-circuit release	2400...4800A
Type of electrical connection of main circuit	Screw connection
Device construction	Built-in device fixed built-in technique
With switched-off indicator	Yes
Number of poles	3
Type of control element	Rocker lever
Motor drive integrated	No
Motor drive optional	Yes
Degree of protection (IP)	IP20

Dimension drawing

Front connected

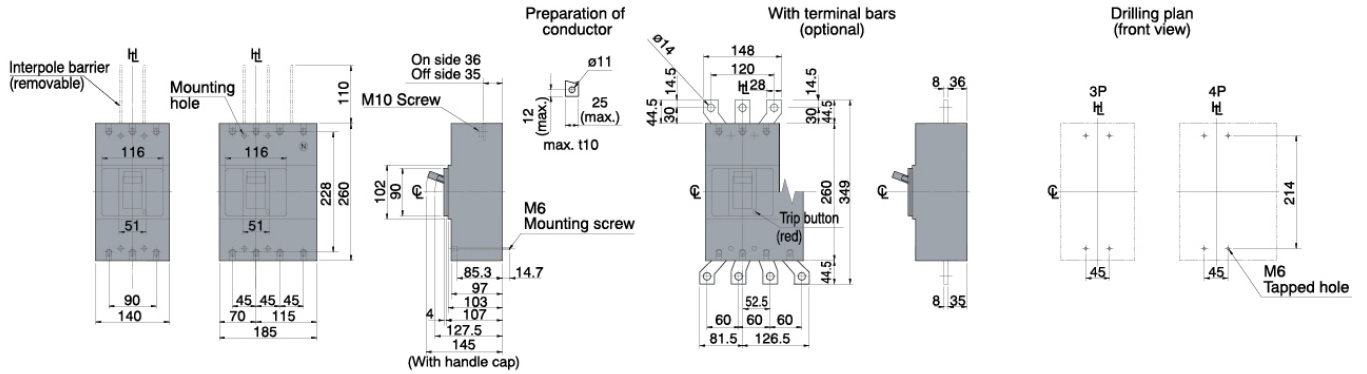

Rear connected

