

# EFI-P4 AC 25/0.5



## Specifications

ETI Code	002061641
Description	EFI-P4 AC 25/0.5
Class name	RCCB
Rated residual current (A)	0.5A
Residual current type	AC
Rated current (A)	25A
Depth (mm)	68mm
Mounting type	TH 35
Number of poles	3+N
Rated conditional short-circuit current $I_{nc}$ (kA)	10kA
Rated AC voltage (V)	400V/415V
Rated Frequency (Hz)	50Hz/60Hz
Rated cross section	1mm <sup>2</sup> -25mm <sup>2</sup>
Standards	IEC/EN 61008
IP rating	IP20

Online product page

## Other documentation




[Technical data catalogue](#)  
[Certificate](#)  
[3D Model](#)  
[2D File](#)  
[Instruction manual](#)  
[CE declaration](#)  
[White paper](#)  
[Eplan file](#)

## ETIM international classification

Classification	EC000003
Class name	Residual current circuit breaker (RCCB)
Number of poles	4
Rated voltage	415V
Rated current	25A
Rated fault current	500mA
Mounting method	DIN rail
Leakage current type	AC
Selective protection	No
Short-time delayed tripping	No
Short-circuit breaking capacity (I <sub>cn</sub> )	10kA
Surge current capacity	0,4kA
Frequency	50/60 Hz
Additional equipment possible	Yes
Degree of protection (IP)	IP20
Width in number of modular spacings	4
Built-in depth	68mm
Connectable conductor cross section multi-wired	1...25mm <sup>2</sup>

# Dimension drawing

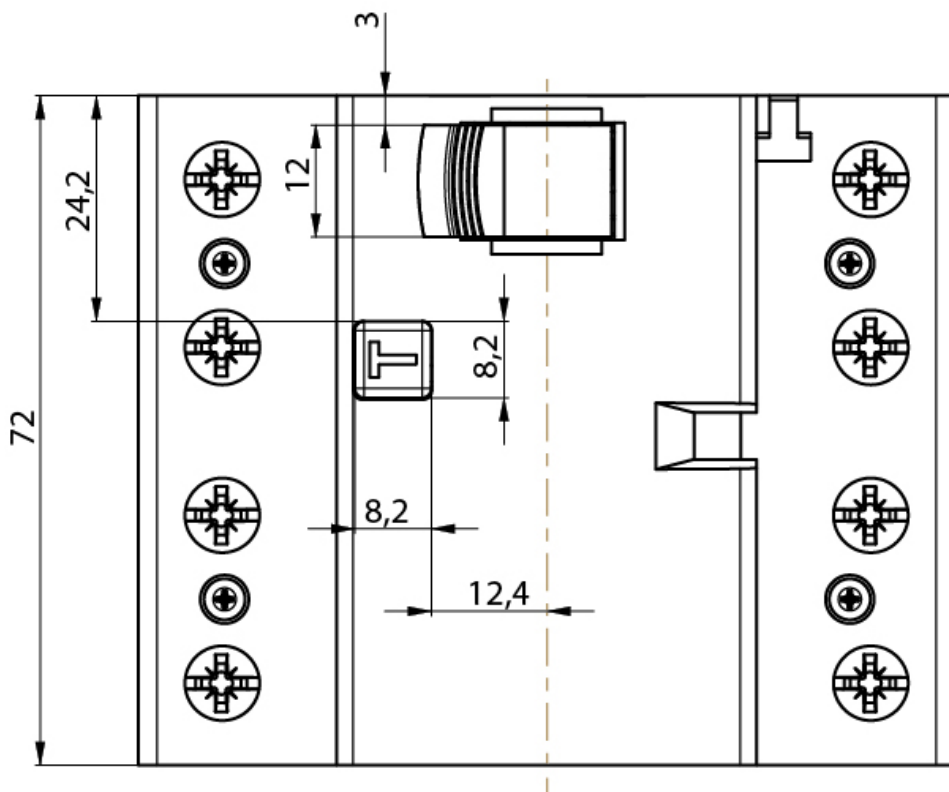



## Wiring diagram

