

ETIMAT P6 3p B50



Specifications

ETI Code	001900315
Description	ETIMAT P6 3p B50
Class name	Miniature circuit breaker
Rated current (A)	50A
Tripping characteristic	B
Number of poles	3
Short circuit capacity (kA)	6kA
Voltage type	AC
Rated impulse withstand voltage Uimp (kV)	6kV
Rated AC voltage (V)	415V
Rated DC voltage (V)	415V
Rated Frequency (Hz)	50Hz/60Hz
Rated cross section	1mm ² -25mm ²
Standards	60898-1,60947-2
function	MCB

Online product page [🔗](#)

Other documentation



Technical data catalogue

3D Model

2D File

Instruction manual


CE declaration

Eplan file


ETIM international classification

Classification	EC000042
Class name	Miniature circuit breaker (MCB)
Release characteristic	B
Number of poles (total)	3
Number of protected poles	3
Rated current	50A
Rated voltage	415V
Rated insulation voltage U_i	500V
Rated impulse withstand voltage U_{imp}	6kV
Rated short-circuit breaking capacity I_{cn} according to EN 60898 at 230 V	6kA
Rated short-circuit breaking capacity I_{cn} according to EN 60898 at 400 V	6kA
Rated short-circuit breaking capacity I_{cu} according to IEC 60947-2 at 230 V	6kA
Rated short-circuit breaking capacity I_{cu} according to IEC 60947-2 at 400 V	6kA
Voltage type	AC
Frequency	50...60Hz
Current limiting class	3
Suitable for flush-mounted installation	Yes
Concurrently switching neutral conductor	Yes
Over voltage category	3
Pollution degree	2
Additional equipment possible	Yes
Width in number of modular spacings	3
Built-in depth	70mm
Degree of protection (IP)	IP20
Ambient temperature during operating	-40...70°C
Connectable conductor cross section multi-wired	1...25mm ²
Connectable conductor cross section solid-core	1...25mm ²

Melting energy characteristics

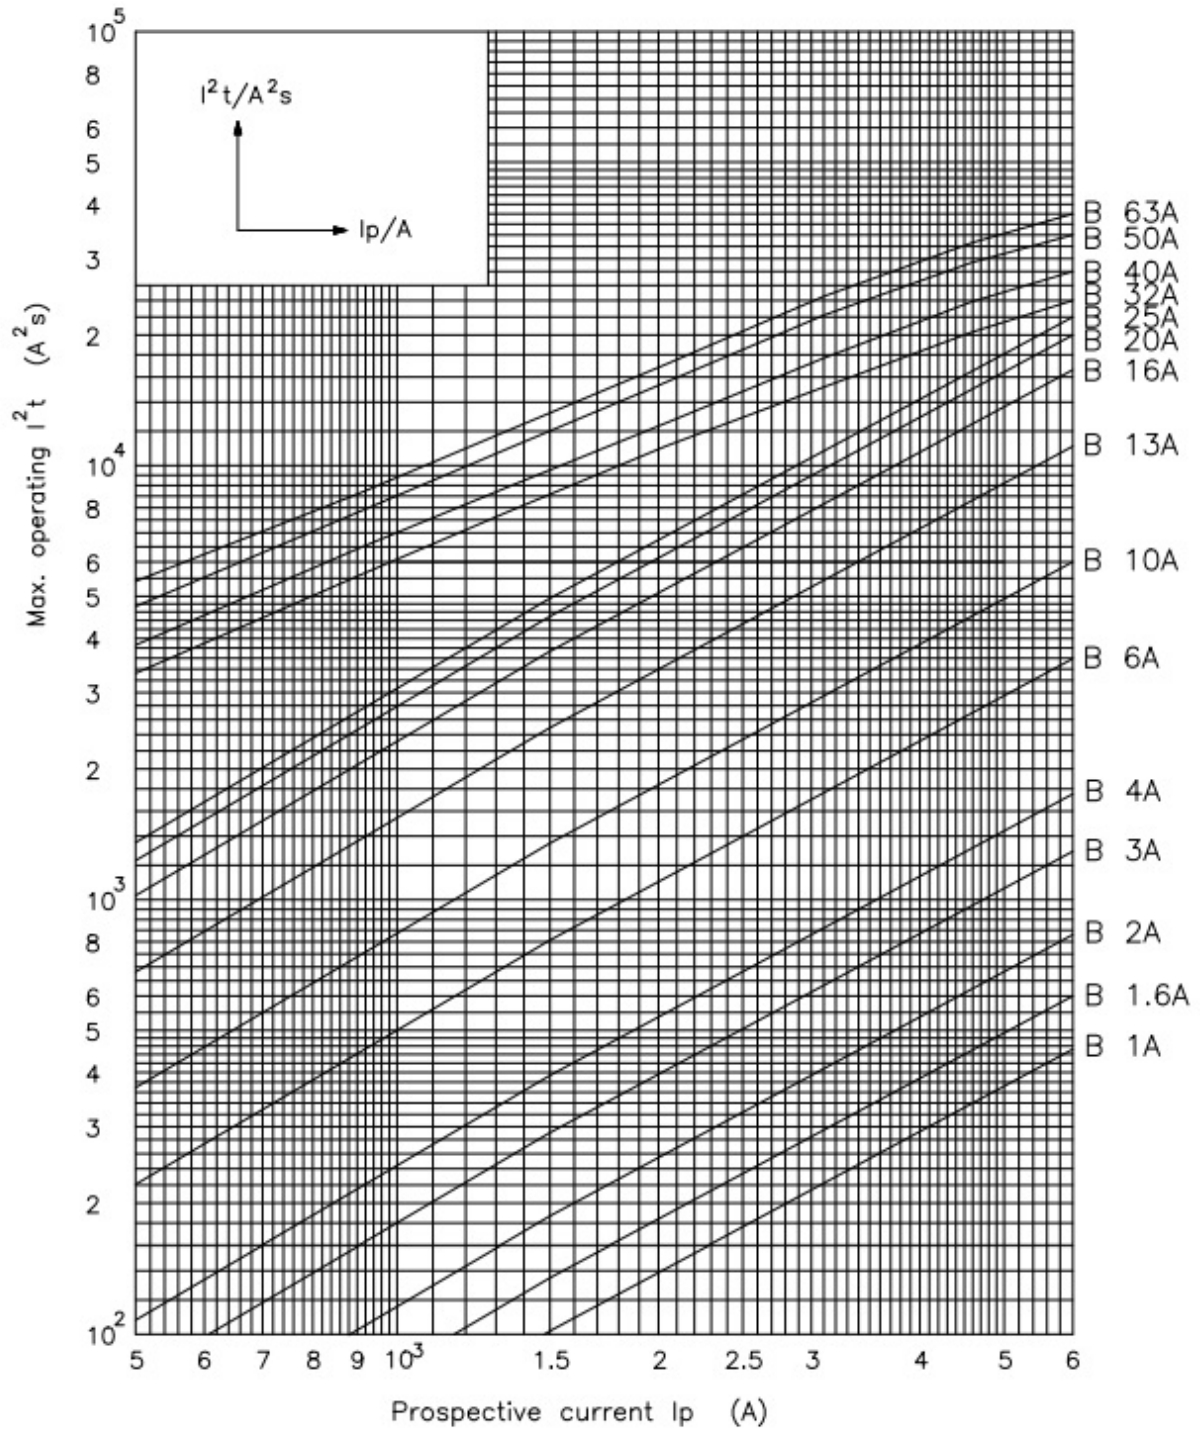

Dimension drawing

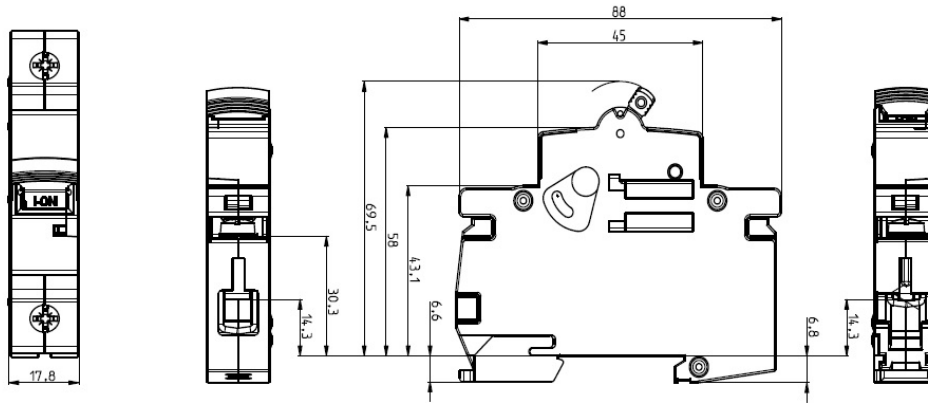

Symbol/Connection

1p



1p+n



2p



3p



3p+n

